


Concealed Slim Door Closer Variable Power Size 2-4

Product Images



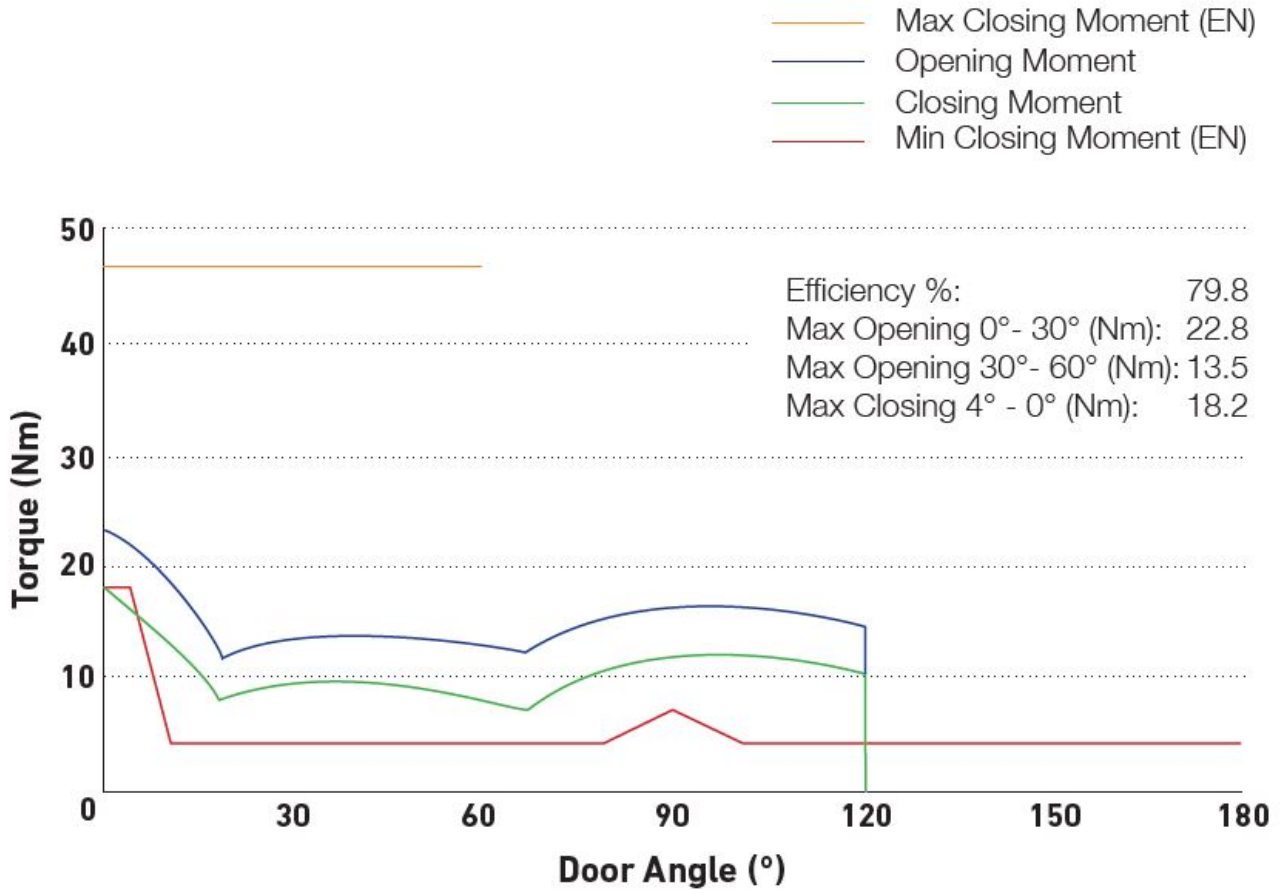


The DCC2024CF concealed door closer has an opening force (0-30°) less than 30N when fitted to a minimum width door of 760mm, and has an opening force (30-60°) less than 22.5N when fitted to a minimum width door of 600mm tested in laboratory conditions. Therefore the suitable width of door for the DCC2024CF concealed door closer fixed in the above fixing position is 760mm.

Description

Concealed Slim Door Closer Variable Power Size 2-4. (c/w slide arm). Carries the CE mark and is Certifire accredited. Certified to BS EN 1154 and BS 8300 to meet the needs of disabled people. Comes with a 10 year mechanical guarantee and is Fire door rated. Suitable for all domestic, commercial and industrial use. Suitable for left and right hand application. Suitable for doors up to 80kg and/or 1100mm wide

Technical Details

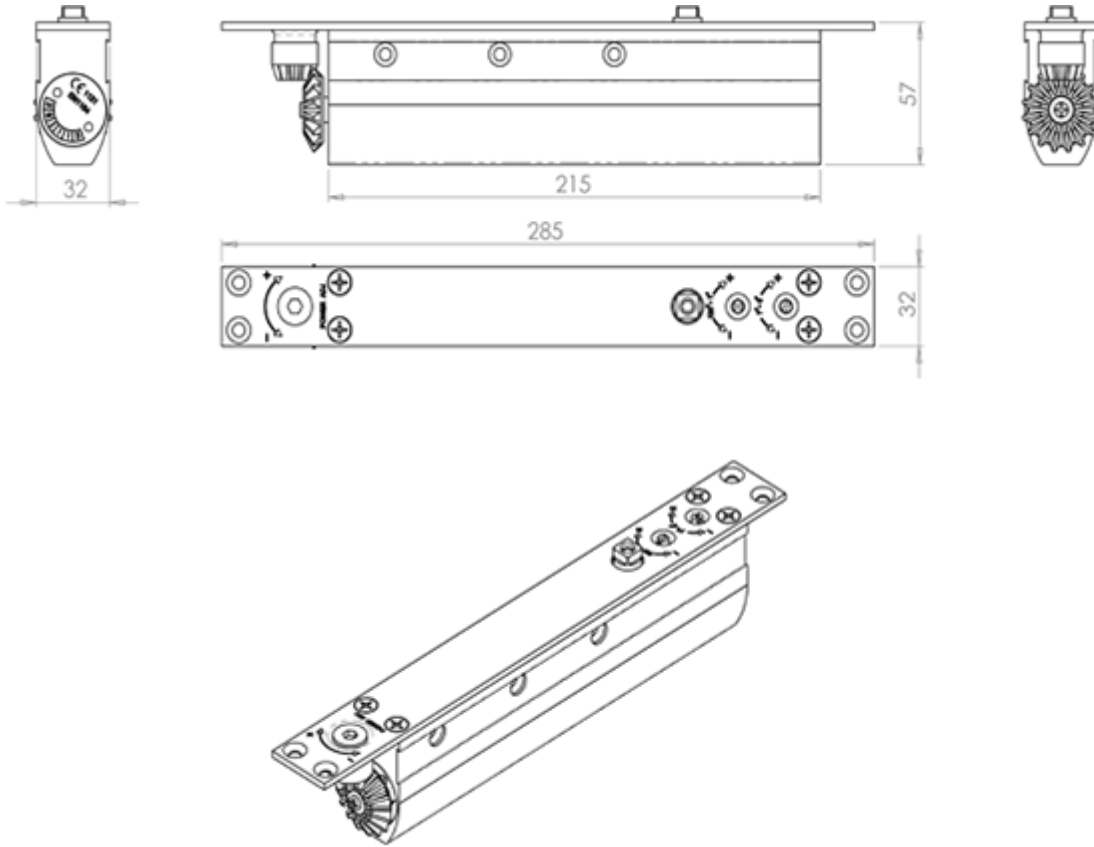

DCC2024CF

Specification



Additional Information

SKU	DCC2024CF/SV
Brands	Eurospec
Finishes	Silver
Sizes	215mm x 54mm x 32mm
Features	Slimline body
Technical	27,15,21,4,12,58
Line Drawings	DCC2024CF.PDF